



## Distribution Box

### Application


Combination illuminating distribution box is suitable for distributing control of modern buildings such as large stories buildings, guesthouse, passenger transport station, commercial net point, laboratory, factory, enterprises etc., used in AC 50-60Hz, below 415V illuminating and mini power controlling circuit as over current, overload & short circuit protection and frequency switch under the rated working state. 1 line, 2 lines, 4 lines, 6 lines, 8 lines, 12 lines, 18 lines, 24 lines & 36 lines are available.

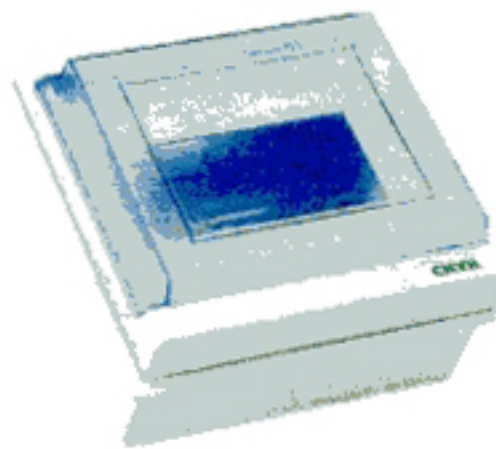


ZY-4 4 ways

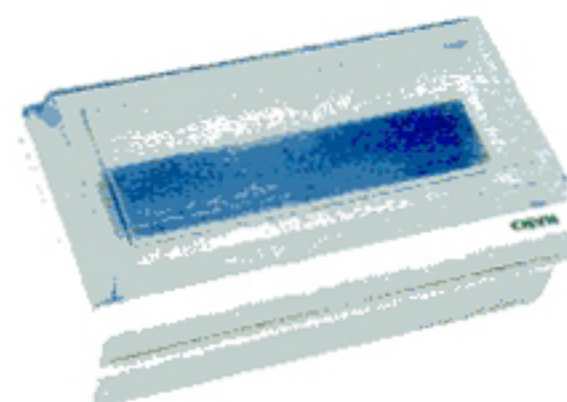

ZY-12 12 ways

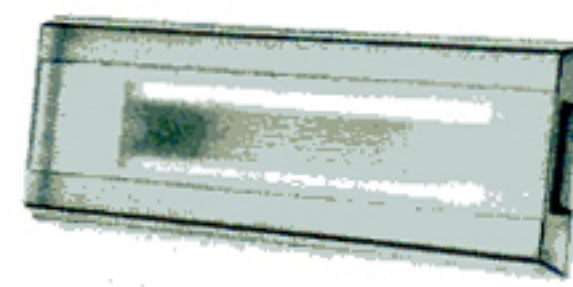

ABC-500 8 ways

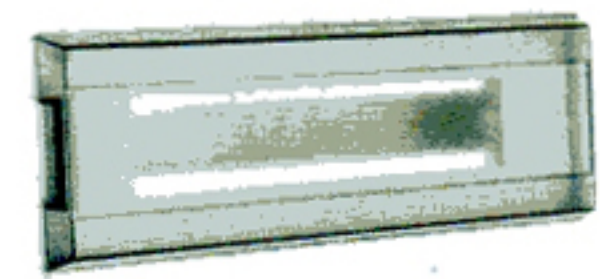


ABC-700 12 ways

### Technical specification

Model	Way	Installing size (mm)			Material
		Length	Width	Depth	
ZY-4	4	130	140	90	Plastic
ZY-6	6	170	140	90	
ZY-8	8	210	140	90	
ZY-12	12	260	158	93	
ZY-16	16	210	280	90	

Model	Way	Installing size (mm)			Material
		Length	Width	Depth	
ABC-500	8	220	145	93	Plastic
ABC-700	12	250	175	97	
ABC-900	14	320	175	93	
ABC-1019	18	370	185	105	


## MCCU Metal Case Consumer Unit

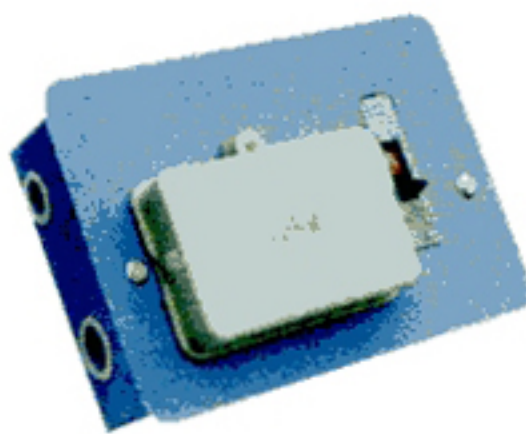

MCCU (4 ways)



MCCU (6 ways)

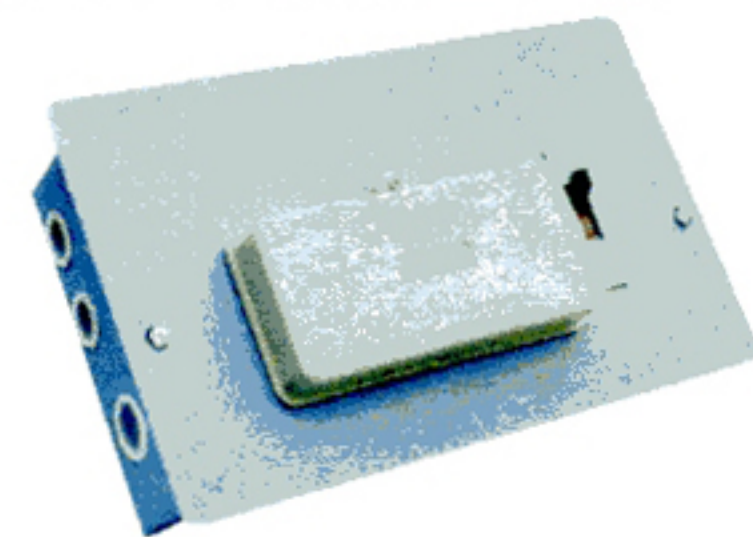


MCCU (8 ways)

## PCCU Plastic Case Consumer Unit




PCCU (1 ways)

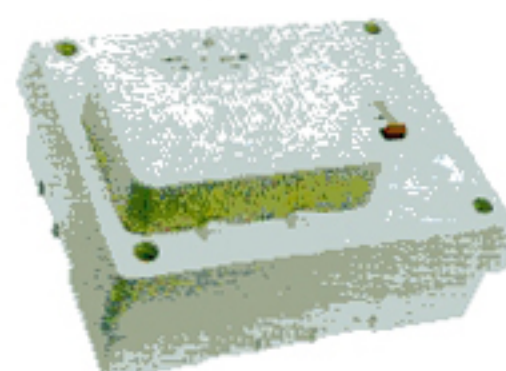

PCCU (4 ways)



PCCU (6 ways)

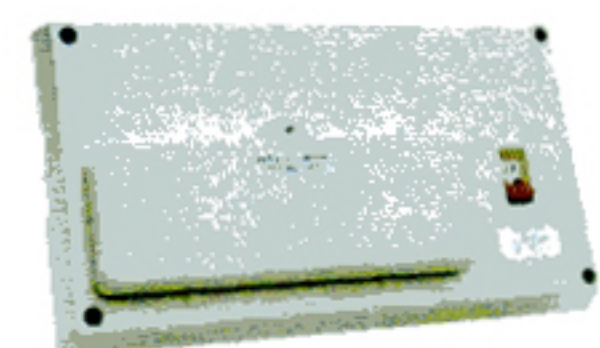

PCCU (8 ways)