




## QJX2(LC3-D) Star-Delta Reduced Voltage Starter

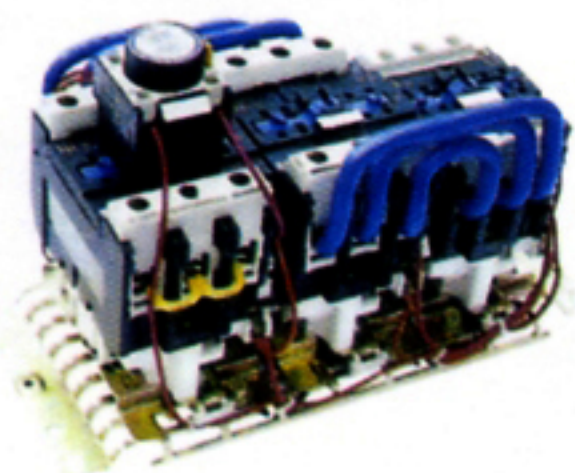

QJX2(LC3-D) 803

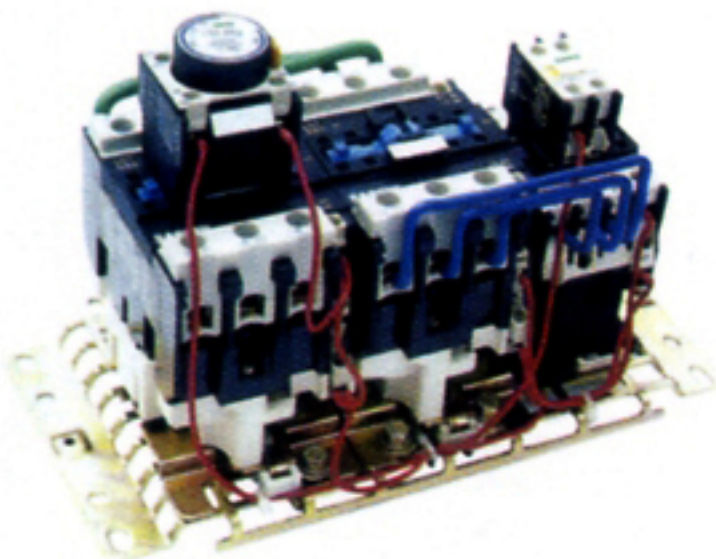

QJX2(LC3-D) 503

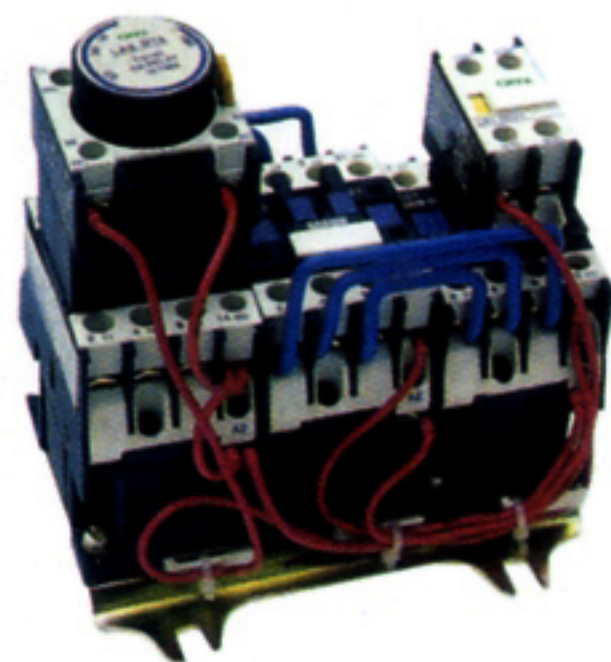

QJX2(LC3-D) 183

### Application

QJX2(LC3-D) series star delta reduced voltage starter is suitable for starting motor in the circuit of AC 50/60Hz, voltage up to 660V and current up to 95A. It is provided with a timer for automatic changeover of star-delta to reduce the voltage and current of motor starting.

### Specifications

| Type               | Rated operating current (A) | 3-phase motor capacity(kw) |            |      |      |
|--------------------|-----------------------------|----------------------------|------------|------|------|
|                    |                             | 220V                       | AC3 Loaded |      |      |
|                    | AC3                         |                            | 380V       | 415V | 440V |
| QJX2-093(LC3-D093) | 9                           | 4                          | 7.5        | 7.5  | 7.5  |
| QJX2-123(LC3-D123) | 12                          | 5.5                        | 11         | 11   | 11   |
| QJX2-183(LC3-D183) | 17                          | 11                         | 18.5       | 22   | 22   |
| QJX2-253(LC3-D253) | 25                          | 11                         | 22         | 22   | 22   |
| QJX2-323(LC3-D323) | 32                          | 15                         | 25         | 30   | 30   |
| QJX2-403(LC3-D403) | 40                          | 18.5                       | 37         | 37   | 37   |
| QJX2-503(LC3-D503) | 50                          | 30                         | 55         | 59   | 59   |
| QJX2-653(LC3-D653) | 65                          | 32                         | 55         | 59   | 59   |
| QJX2-803(LC3-D803) | 80                          | 37                         | 75         | 75   | 75   |
| QJX2-953(LC3-D953) | 95                          | 45                         | 80         | 80   | 80   |

### Dimensions

