


CJX5(S-K) Ac Contactor


Application

CJX5(S-K) series magnetic AC Contactors are a new generation of contactors. The contactor is suitable for remote making and breaking circuits or frequently starting and controlling of AC motor with 50/60Hz rated voltage up to 660V, rated operating current 9, 12, 16, 22, 30, 40, 50 and 105A at rated operating voltage 380V under the utilization category AC-3.


Specifications

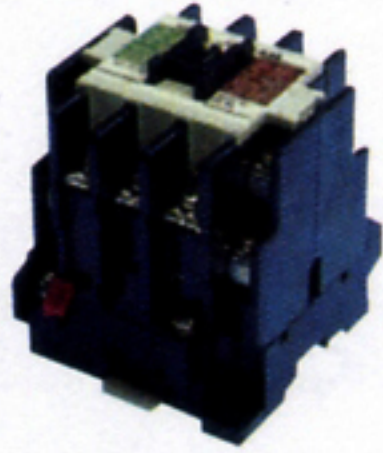


CJX5-40
(S-K35)

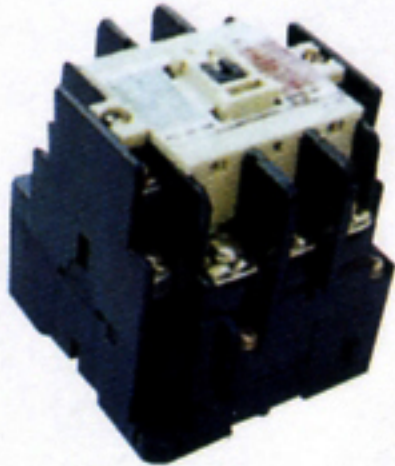

CJX5-50
(S-K50)

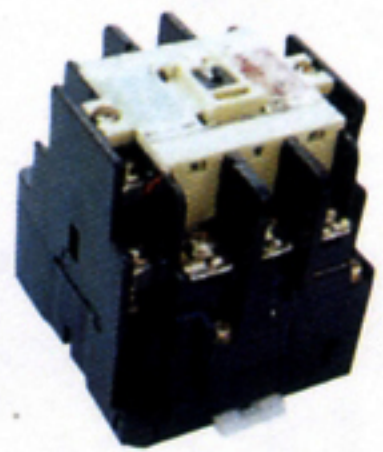

CJX5-62
(S-K65)

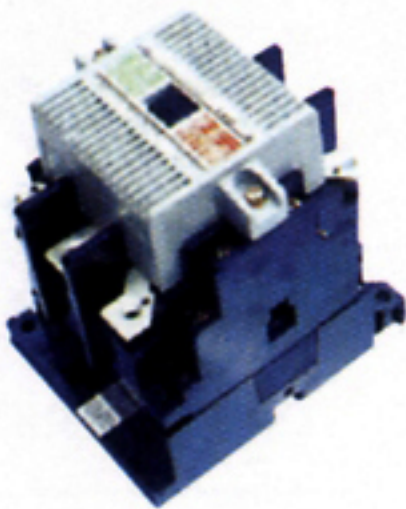

CJX5-85
(S-K80)



CJX5-105
(S-K95)

Contactor type	CJX5-9 (S-K10)	CJX5-12 (S-K11)	CJX5-12 (S-K12)	CJX5-18 (S-K18)	CJX5-22 (S-K20)	CJX5-22 (S-K21)
Rated operating current in 220V(A)	11	13	13	18	22	22
Rated operating current in 380V(A)	9	12	12	16	22	22
Rated operating current in 660V(A)	5	7	7	9	9	9
Controlled motor Power under AC-3 (KW)	at 220V(A)	2.2	3	3	4	5.5
	at 380V(A)	3.3	4	4	6	10
	at 660V(A)	3.3	4.5	4.5	5.5	10
Coil consumption at rated coil voltage	3.5	3.5	3.5	3.5	5.3	5.3
Rated frequency of operation Ops/hr	1800					
Electric life under AC-3	1 × 10 ⁶					

Contactor type	CJX5-30 (S-K25)	CJX5-40 (S-K35)	CJX5-50 (S-K50)	CJX5-62 (S-K65)	CJX5-85 (S-K80)	CJX5-105 (S-K95)
Rated operating current in 220V(A)	30	40	55	65	85	105
Rated operating current in 380V(A)	30	40	50	62	85	105
Rated operating current in 660V(A)	12	17	26	35	52	65
Controlled motor Power under AC-3 (KW)	at 220V(A)	8.5	12	17	19	24
	at 380V(A)	14	20	25	32	40
	at 660V(A)	14	20	30	40	50
Coil consumption at rated coil voltage	5.3	5.3	2.8	2.8	2.8	2.8
Rated frequency of operation Ops/hr	1800			1200		
Electric life under AC-3	1 × 10 ⁶					

Type	UA-AX422	UA-AX431	UA-AX440	UA-AX413	UA-AX404
NO	2	3	4	1	0
NC	2	1	0	3	4

Type	UA-AX211	UA-AX220	UA-AX202	UA-AX2	UA-AX4
NO	1	2	0		
NC	1	0	2		